

## Leveringsprogramma wapeningsstaal


### Kruisnetten afmeting 5000 x 2000

Merk wap. mm <sup>2</sup> /m <sup>1</sup>	Hoofd-wapening mm	Verdeel-wapening mm	Netlengte-breedte mm	Net-gewicht kg
P 50	3 - 50	3 - 50	5000-2000	22,19
P 262	5 - 75	5 - 75	5000-2000	41,43
P 196	5 - 100	5 - 100	5000-2000	30,80
P 283	6 - 100	6 - 100	5000-2000	44,40
P 503	8 - 100	8 - 100	5000-2000	79,00
P 784	10 - 100	10 - 100	5000-2000	123,40
P 830*	12 - 100	12 - 100	5000-2000	177,60
P 84	4 - 150	4 - 150	5000-2000	12,97
P 131	5 - 150	5 - 150	5000-2000	20,17
P 189	6 - 150	6 - 150	5000-2000	29,08
P 257	7 - 150	7 - 150	5000-2000	39,56
P 335	8 - 150	8 - 150	5000-2000	51,75
P 524	10 - 150	10 - 150	5000-2000	80,85
P 754	12 - 150	12 - 150	5000-2000	116,33
P 98	5 - 200	5 - 200	5000-2000	15,40
P 141	6 - 200	6 - 200	5000-2000	22,20
P 251	8 - 200	8 - 200	5000-2000	39,50
P 393*	10 - 200	10 - 200	5000-2000	61,70
P 415*	12 - 200	12 - 200	5000-2000	88,80
P 79	5 - 250	5 - 250	5000-2000	12,32
½ P 84	4 - 150	4 - 150	2500-2000	6,62
½ P 131	5 - 150	5 - 150	2500-2000	10,28
½ P 189	6 - 150	6 - 150	2500-2000	14,70
½ P 335	8 - 150	8 - 150	2500-2000	26,27

\* Op aanvraag leverbaar




Tevens leverbaar kruisnetten gegalvaniseerd in diverse afmetingen

### B-netten

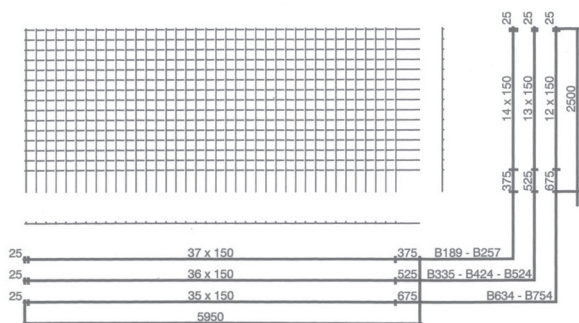

B 189	6 - 150	6 - 150	5950-2500	40,90
B 257	7 - 150	7 - 150	5950-2500	55,64
B 335	8 - 150	8 - 150	5950-2500	69,44
B 424	9 - 150	9 - 150	5950-2500	87,72
B 524	10 - 150	10 - 150	5950-2500	108,47
B 634	11 - 150	11 - 150	5950-2500	124,84
B 754	12 - 150	12 - 150	5950-2500	148,61
B 503	8 - 100	8 - 100	6000-2500	105,07
B 636	9 - 100	9 - 100	6000-2500	132,73
B 785	10 - 100	10 - 100	6000-2500	164,12
B 830	12 - 100	12 - 100	6000-2500	221,09

### Letter-netten

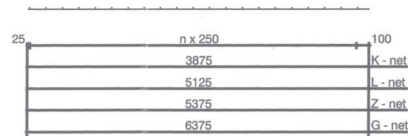

### K-netten

Merk wap. mm <sup>2</sup> /m <sup>1</sup>	Hoofd-wapening mm	Verdeel-wapening mm	Netlengte-breedte mm	Net-gewicht kg
K 189	6 - 150	5 - 250	3875-2500	19,06
K 257	7 - 150	5 - 250	3875-2500	23,71
K 295	7 <sup>5</sup> -150	5 - 250	3875-2500	26,33
K 335	8 - 150	5 - 250	3875-2500	29,12
K 424	9 - 150	5 <sup>5</sup> -250	3875-2500	36,48
K 524	10 - 150	6 - 250	3875-2500	44,74
K 634	11 - 150	6 <sup>5</sup> -250	3875-2500	53,76
K 754	12 - 150	7 - 250	3875-2500	63,70

### L-netten

L 189	6 - 150	5 - 250	5125-2500	25,15
L 295	7 <sup>5</sup> -150	5 - 250	5125-2500	34,76
L 378	8 <sup>5</sup> -150	5 - 250	5125-2500	42,29
L 524	10 - 150	6 - 250	5125-2500	59,09
L 754	12 - 150	7 - 250	5125-2500	84,12

### Z-netten

Z 257	7 - 150	5 - 250	5375-2500	32,82
Z 335	8 - 150	5 - 250	5375-2500	40,32
Z 424	9 - 150	5 <sup>5</sup> -250	5375-2500	50,52

### G-netten

G 295	7 <sup>5</sup> -150	5 - 250	6375-2500	43,19
G 335	8 - 150	5 - 250	6375-2500	47,78
G 424	9 - 150	5 <sup>5</sup> -250	6375-2500	59,87
G 524	10 - 150	6 - 250	6375-2500	73,43
G 754	12 - 150	7 - 250	6375-2500	104,55




Wilt u meer informatie?

Bel dan (0320) 289 600 of


kijk op [www.wapeningscentralesupport.nl](http://www.wapeningscentralesupport.nl)

## W-netten

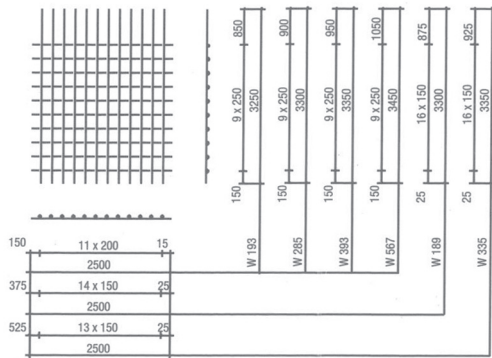


Merk wap. mm <sup>2</sup> /m <sup>1</sup>	Hoofd-wapening mm	Verdeel-wapening mm	Netlengte-breedte mm	Net-gewicht kg
W 189	6 - 150	6 - 150	3300-2500	20,42
W 193	7 - 200	5 - 250	3250-2500	15,63
W 285	8 <sup>5</sup> - 200	5 - 250	3300-2500	21,47
W 335	8 - 150	8 - 150	3350-2500	35,31
W 393	10 - 200	6 - 250	3350-2500	30,35
W 524	10 - 150	10 - 150	3450-2500	56,02
W 567	12 - 200	7 - 250	3450-2500	44,31

## U-netten

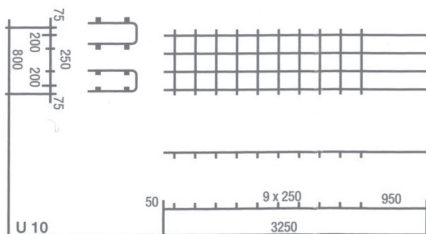


U 10	10 - 200	6 - 250	3350-800	10,04
U 12	12 - 200	7 - 250	3450-800	14,67

## S-netten

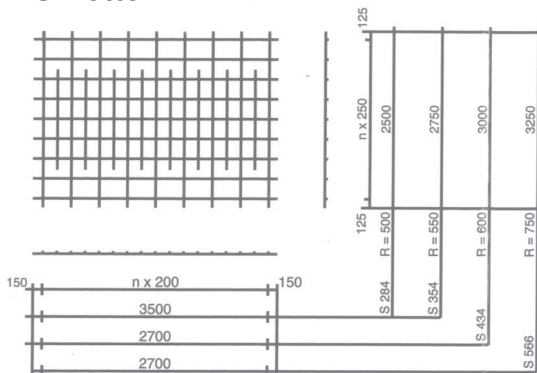


S 284	5 - 250	8 <sup>5</sup> - 200	3500-2500	20,74
S 354	5 <sup>5</sup> - 250	9 <sup>5</sup> - 200	3500-2750	28,30
S 434	6 - 250	10 <sup>5</sup> - 200	2700-3000	28,82
S 566	7 - 250	12 - 200	2700-3250	40,13

## Steknetten

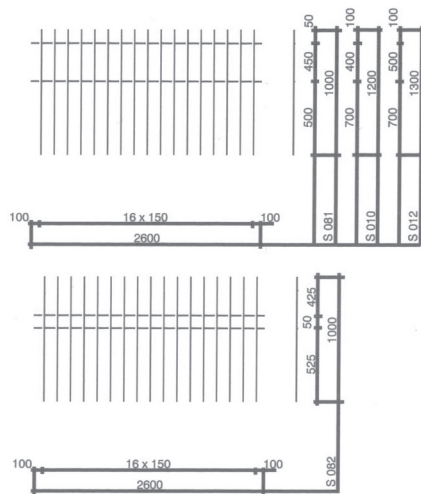


Merk wap. mm <sup>2</sup> /m <sup>1</sup>	Hoofd-wapening mm	Verdeel-wapening mm	Netlengte-breedte mm	Net-gewicht kg
S 081	8 - 150	5 - 450	2600-1000	7,52
S 082	8 - 150	5 - 50	2600-1000	7,52
S 010	10 - 150	6 - 400	2600-1200	13,74
S 012	12 - 150	7 - 500	2600-1300	21,20

## E-netten

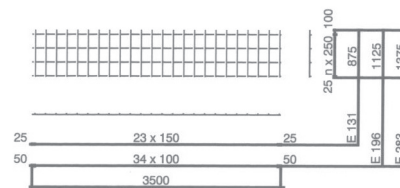

E 131	5 - 250	5 - 150	3500- 875	5,39
E 196	5 - 250	5 - 100	3500-1125	8,76
E 283	5 - 250	6 - 100	3500-1375	13,92

## V-netten

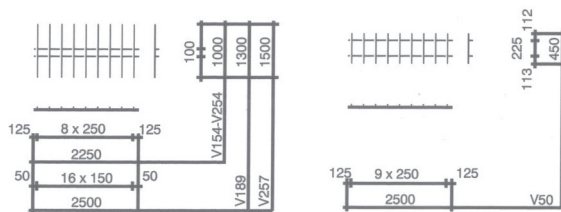

V 50	5 - 225	5 - 250	2500- 450	1,46
V 154	5 - 100	7 - 250	2250-1000	3,41
V 189	5 - 100	6 - 150	2500-1300	5,68
V 254	6 - 100	9 - 250	2250-1000	5,49
V 257	5 - 100	7 - 150	2500-1500	8,47

## Supportliggers

Lengte 2 meter

type	hoogte	type	hoogte	type	hoogte
H 50	50 mm	H 120	120 mm	H 190	190 mm
H 60	60 mm	H 130	130 mm	H 200	200 mm
H 70	70 mm	H 140	140 mm	H 210	210 mm
H 80	80 mm	H 150	150 mm	H 220	220 mm
H 90	90 mm	H 160	160 mm	H 230	230 mm
H 100	100 mm	H 170	170 mm	H 240	240 mm
H 110	110 mm	H 180	180 mm	H 250	250 mm

Vanaf H 260 op aanvraag



Mortelstraat 7 - 8211 AD Lelystad - Tel.: (036) - 289 600

Postbus 2131 - 8203 AC Lelystad - Fax: (036) - 289 608

[www.wapeningscentralesupport.nl](http://www.wapeningscentralesupport.nl) - [info@wapeningscentralesupport.nl](mailto:info@wapeningscentralesupport.nl)